



Item No. _____

C902

Frozen Beverage Freezer

Two Flavor

Features

Vary your menu by offering smoothies, frozen cocktails, fruit juices, coffees, cappuccino and tea slush beverages, all served at the desired thickness.

Freezing Cylinder

Two, 3.3 quart (3.1 liter).

Mix Hopper

Two, 8 quart (7.6 liter).

Indicator Lights

Add Mix light alerts the operator to add mix. When the Mix Out light flashes, the unit automatically shuts down to prevent damage.

Automatic Consistency Control

A specially designed viscosity control automatically maintains superior product quality. An adjustable control allows the operator to serve a wide variety of frozen beverages at the desired thickness.

Lighted Display


Self-merchandising lighted display backlights the translucent static cling and downlights the dispensing door. Three static clings are standard: Frozen Drinks, Frozen Cocktails, and Smoothies.

Flavor Cards

Set of four flavor cards included: Cappuccino, Lemon, Lime, Strawberry

Air Filter

Easily removable, cleanable air filter helps keep condenser clean for optimal refrigeration system performance.

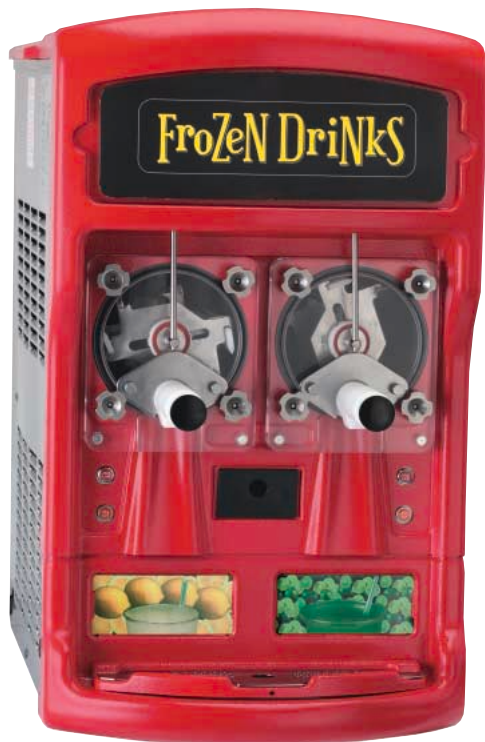

Front Panel is Red.

C902




Rockton, Illinois 61072
800-255-0626
Phone 815-624-8333 Fax 815-624-8000
www.taylor-company.com
e-mail: info@taylor-company.com

International Office
Taylor Company S.r.l.
Roma, Italy
Tel: **+39-06-420-12002** Fax: +39-06-420-12034
e-mail: romeoff@taylor-company.com

ISO 9001:2000
Registered Firm

C902 Frozen Beverage Freezer

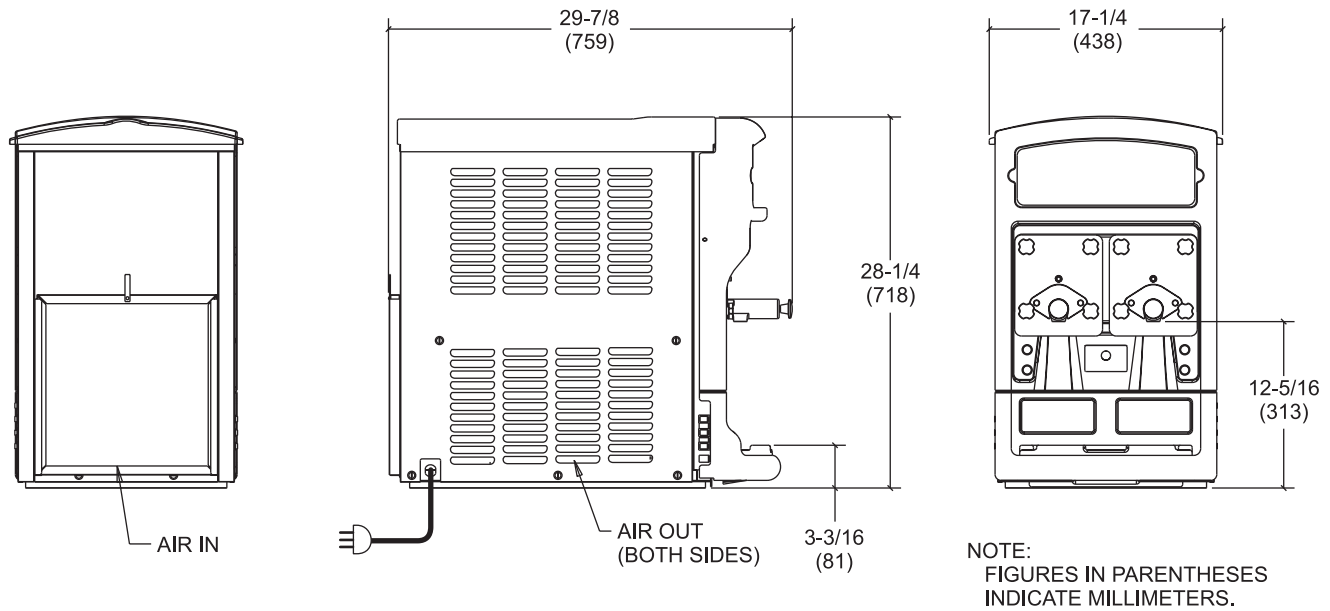

Weights	lbs.	kgs.
Net	255	115.7
Crated	305	138.4
	cu. ft.	cu. m.
Volume	23.0	0.65

Dimensions	in.	mm.
Width	17-1/4	438
Depth	29-7/8	759
Height	28-1/4	718
Counter Clearance	---	---

*Designed to rest on a plastic pad directly on counter top.

Electrical	Total Amps	Supplied with NEMA Cord
115/60/1 Air	16	5-20P
220-240/50/1 Air	10	----

This unit may be manufactured in other electrical characteristics. Refer to the local Taylor Distributor for availability. (For exact electrical information, always refer to the data label of the unit.)

Bidding Specs

Electrical: Volt _____ Hz _____ ph _____
 Neutral: Yes No Cooling: Air Water NA

Options: _____

Specifications

Electrical

One dedicated electrical connection is required. See the Electrical chart for the proper electrical requirements. Manufactured to be cord connected.

Refrigeration System

Two, approximately 2,200 BTU/hr compressors. R134a. (BTUs may vary depending on compressor used.)

Beater Motor

Two, 1/8 HP, direct drive.

Air Cooled

Minimum Clearance: 3" (76 mm) on all sides. Minimum air clearances must be met to assure adequate air flow for optimum performance.

Options

- Continuous Fill Kit (requires separate Mix Delivery System)

Continuing research results in steady improvements; therefore, these specifications are subject to change without notice.



Taylor Company,
 A Division of Carrier Commercial Refrigeration, Inc.
 Rockton, Illinois 61072
 815-624-8333 **800-255-0626** Fax 815-624-8000
www.taylor-company.com

Printed in U.S.A.

055461-ADV 1/05